



## Heat Activated Ceiling - WC4000

The **Heat Activated Ceiling** designed by **TRIAD** is a light weight inexpensive roof system designed to shrink and drop away in the event of a fire allowing the fire suppression system to operate as required.




Frame attaches to top  
of server cabinets

Clear polyvinyl  
shrink and drop  
panel

UL Listed and FM  
Approved for use  
under fire suppres-  
sion systems

# Technical Specifications

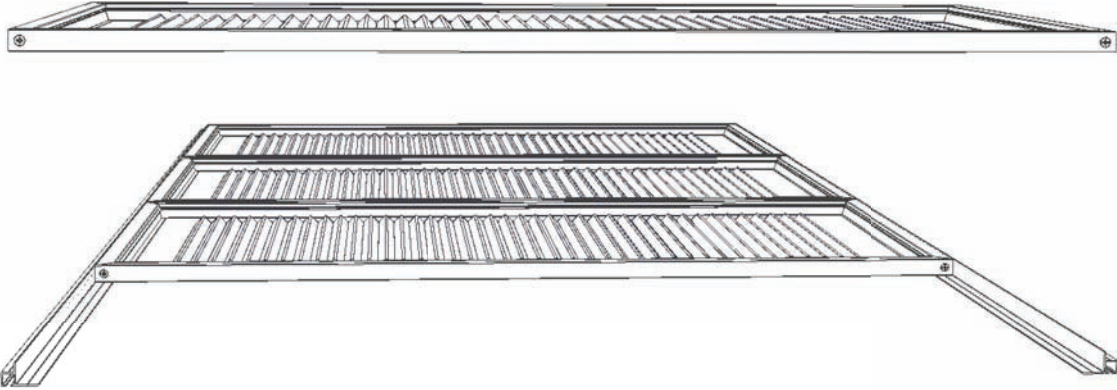

## Frame:

<b>Material</b>	6063 T-6 Temper Aluminum
<b>Tensile Strength</b>	30,000 psi
<b>Typical Panel Size</b>	26" x 50"
<b>Typical Outer Frame Size</b>	53" x 78"
Frame attaches to top of Server Cabinets with included mounting kit	
UL Listed for use under fire suppression systems	
FM Approved for use under fire suppression systems	

## Ceiling Panels:

<b>Material</b>	15 Mil Clear Polyvinyl Chloride
<b>Smoke Deviation ASTM E84</b>	170 test result
<b>Flame Spread ASTM E84</b>	20 Test Result
<b>Shipping Weight</b>	Approximately 70 lbs per package of 6
Meets or exceeds ASTM E84 Standards	

**TRIAD**  
RAISED ACCESS FLOORING COMPANY

Prices & Designs subject to change without notice. Multiple Patents & Patent Pending covering designs and features shown.  
*\*This copy is provided on a Restricted Basis and is not to be used in any way Detrimental to the Interests of Triad.*