




Rigid Wall Containment Solutions

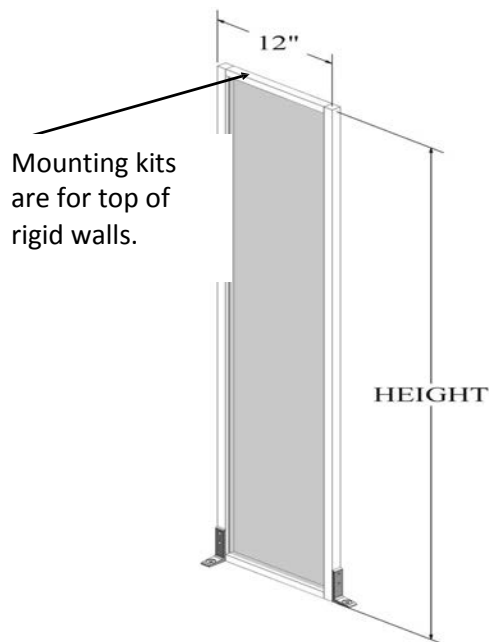

Custom Solutions

- Custom powder paint options
- Custom height and width wall solutions
- Call for custom solutions

Technical Specifications

- Walls can be built to 48" wide
- 3" - 48" wide options
- For walls wider than 48", 2 or more walls can be attached together
- Frame footprint is 1" x 3" — 48"
- Standard clear or black anodize finish or white powder paint
- Must be secured to the floor and at the top of the rigid wall to another wall or cabinet

Walls are made from aircraft grade extruded aluminum frames and clear polycarbonate panels which meet the 2013 NFPA standard for smoke (450 or lower) and flame spread (50 or lower) ASTM E-84 and UL723

Determine Your Part Number Step

Step 1—Select your wall type (rigid wall = **RW**)

Step 2—Select desired wall width (example **24"**)

Step 3—Select desired wall height, usually it is the same as cabinet height (example **85-5/16"**)

Step 4—Determine how the wall will attach (ie, to each cabinet top = **2C**, to one cabinet and one wall = **1CW**, , rigid wall to rigid wall or door = **3JS**, to cabinet to rigid wall or door **5JC**, or free standing = **NC**)

Step 5— Select color, standard colors come in **black = (B)** or **clear = (C)** anodize, as well as **white = (W)** powder paint (**B, C, and W**). Other customized color options and pricing available upon request.

Pricing calculated on per square foot basis.

Example:

Sample order				
RIGID WALL	WALL WIDTH	WALL HEIGHT	CHOOSE TOP MOUNTING PLATE	CHOOSE CLEAR OR BLACK ANODIZE FINISH OR WHITE PAINT
RW	24"	90 1/4"	2C	BLACK

RW-24-90 1/4-2C-B

Description	Last revised: 10-1-2013
Rigid Wall Containment	Sheet 1 of 2

Rigid Wall Containment Solutions

Note: Choosing the right mounting kit is important.

The mounting kits are for mounting the top of the doors and/or walls.

1. To a cabinet top on each side of the door (2C).
2. A cabinet top on one side and a wall on the other (1CW).
3. A cabinet to a rigid wall and rigid wall to a door frame(4JC).
4. A rigid wall to a rigid wall or door frame (3JS).
5. no mounting plates such as a free standing door held in place with 2 mini rigid walls where they stand against a seismic cabinet (NC).

It is important to remember that the doors need to be secured at the top in some way. Shown at right are mounting options and how to order the right mounting kit for your application.

Choosing the right mounting kit insures receiving the right small parts in the installation kit.

MOUNTING PLATE OPTIONS

2C	2 ea. flat slotted mounting plate (cabinet to cabinet)
1CW	1 ea. flat slotted mounting plate 1 ea. angle slotted mounting plate (cabinet to wall)
3JS	3 ea. rigid wall or door mounting strips (rigid wall or door frame)
4JC	1 ea. flat slotted mounting plates and 3 ea. rigid wall or door mounting strips (cabinet to rigid wall and rigid wall to door frame)
NC	no mounting plates included

Note: The mounting kit used to attach to a wall (existing) is different than that used to attach to a rigid wall (clear manufactured polycarbonate).

EXAMPLES: #1. I want a rigid wall (RW) that is 24" wide (W) and is 85-5/16 High (H). It will go between 2 cabinets (2C) and have a black anodized color (B).
On the order form you would write in: **RW- 24"-85 5/16"-2C-B.**

#2. I want a rigid wall (RW) that is 6" wide (W) and is 78-3/4" High (H). It will go between 2 rigid walls (3JS) and have a clear anodized color (C).
On the order form you would write in: **RW- 6"-78 3/4"-3JS-C.**



**This copy is provided on a Restricted Basis and is not to be use in any way Detrimental to the Interests of Triad.*

