



# Rigid Walls



## Standard Features

- Clear fire-rated paneling
- Sturdy aluminum frame
- Custom built to specification
- Tight tolerances for precise fit

## Custom Options

- Custom colors
- Custom logo
- Corrugated paneling
- Brush along edge



*Custom  
designed  
and built  
specifically  
to the  
constraints of  
your installation*

# Technical Data

## Rigid Walls

### Standard Rigid Wall

Size and Finish	
Max Size	50 x 98
Profile Width	1 <sup>3</sup> / <sub>16</sub> "
Standard Finish	Satin Anodize (Gray)
Upgrade Finish	Custom Anodize and Powder Coat Colors


### All Rigid Walls

Door & Frame	
Material	6560 T-6 Temper Aluminum
Tensile Strength	30,000 psi
Paneling	
Material	Polycarbonate
Color	Clear
Odor	Odorless
Thickness	4.5 mm
Self-ignition Temperature:	650°F
Meets or exceeds ASTM E84	

## Standard Specifications

### Expandable Rigid Wall

Size and Finish	
Max Open Width	94"
Max Closed Width	50"
Max Height	98"
Profile Width	2 <sup>1</sup> / <sub>2</sub> "
Standard Finish	Satin Anodize (Gray)
Upgrade Finish	Custom Anodize and Powder Coat Colors

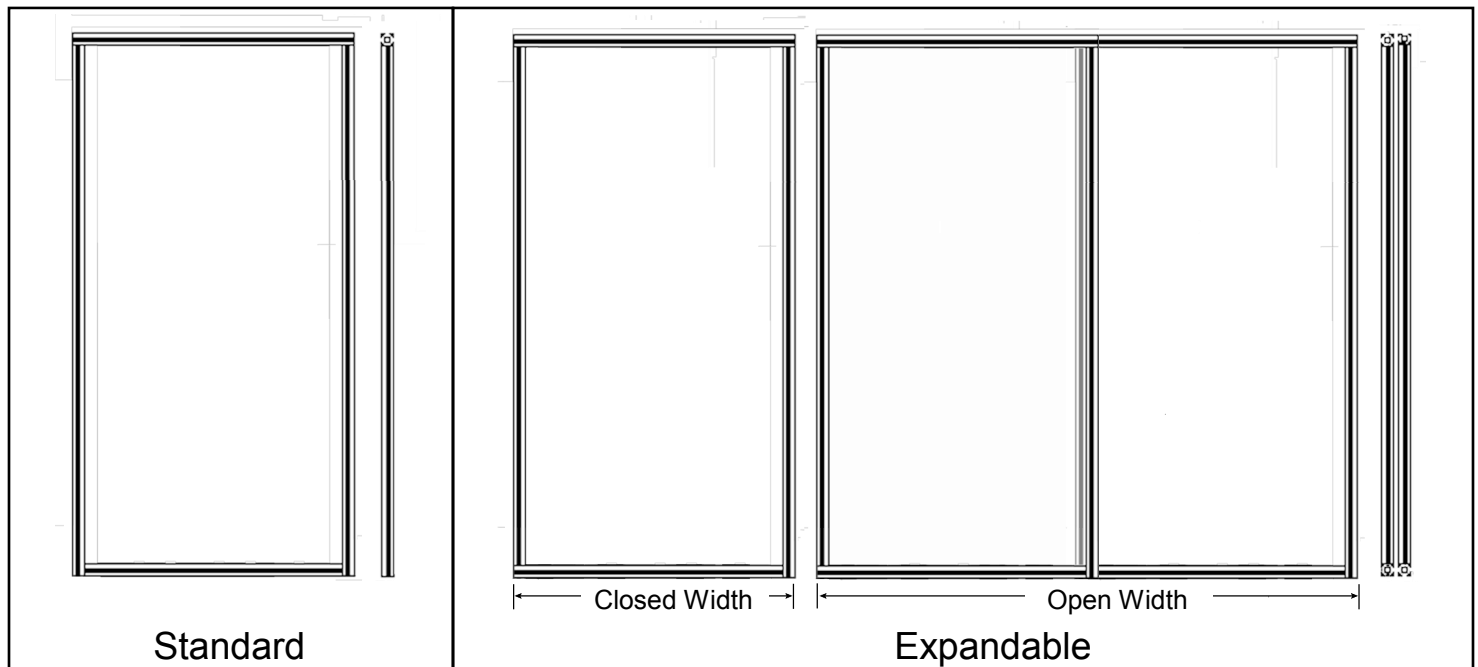

Standard

Expandable